

10 kW **POWERPROTECT™**
Standby Generators

YOU.POWERED.™



Sleek and compact – this standby generator packs a powerful punch.

Equipped with a unique front-facing exhaust for easy placement and installation, our 10kW unit ensures all your home's essential appliances and power needs are covered during even the worst outages.

FEATURES



Warranty

6-Year limited warranty of parts, labor, and travel included for the entire term. The industry's most comprehensive warranty over time.²



Compact Size

50% smaller than competitive generators in its class³ allows for a hassle-free installation.



Assembled and Engineered in USA

Briggs & Stratton generators are designed and assembled in the USA.⁴



Commercial-Grade Vanguard® Engine

Powerful engine built in the USA for commercial applications providing power for electronics.



Flexible Placement Options

Approved for installation as close as 18" to a building⁵ with easy service access to the engine and alternator.



Symphony® II Power Management System (optional)

Customizable to your home's needs offering prioritized whole house power with a more affordable standby generator.



Schaeffer Full Synthetic Generator Oil

Shields engine to reduce wear and tear and allows enhanced cold weather start-up protection to -20°F.

10 kW POWERPROTECT. Standby Generators

Generator Set Rating

Model Name	PP10
Model Number	040684
Running Watts (Liquid Propane/Natural Gas) kW¹	10 / 8
Running Amperage (Liquid Propane/Natural Gas) Amps	41.7 / 33.3
Voltage	120 / 240
Circuit Breaker Amps	50

Fuel Consumption²

No Load (BTU/hr)	NG - 60,000 / LP - 59,000
Half Load (BTU/hr)	NG - 111,000 / LP - 107,000
Full Load (BTU/hr)	NG - 169,000 / LP - 164,000

Product Dimensions

Overall Dimensions (in / mm)	28 x 24.5 x 34.8 / 712 x 622 x 883
Packaged Dimensions (in / mm)	39 x 33.5 x 42 / 991 x 851 x 1063
Assembled Weight (lbs / kg)	272 / 123
Packaged Weight (lbs / kg)	330 / 150

Engine


Manufacturer	Vanguard [®]
Frequency Regulation Steady State	+/-2.5%

Sound Rating⁶

Normal Operating Sound	67 dBA
-------------------------------	--------

Available Accessories

Battery Warmer	6182
Maintenance Kit	6873
Remote Status Monitor	6144
Fuel Regulator Warmer	6845
InfoHub™ Universal - Cellular	6574

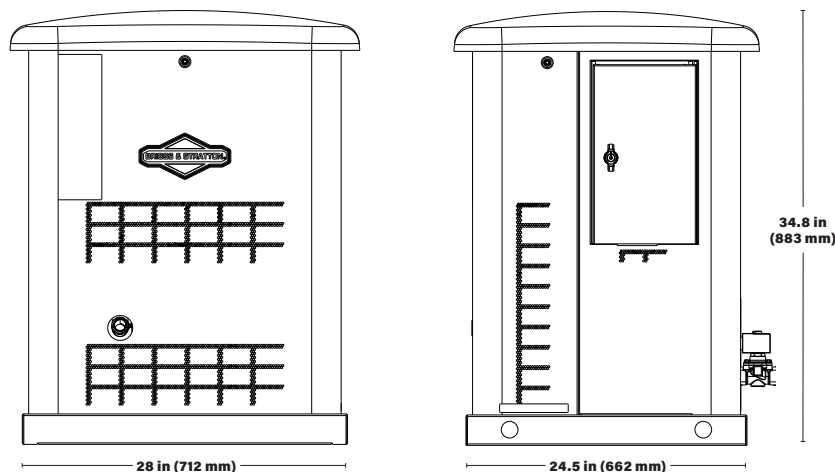

¹ This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-14 (motor and generators).

² See operator's manual or BRIGGSandSTRATTON.com for complete warranty details.

³ 50% smaller footprint than competitors

⁴ Of global and U.S. parts

⁵ The installation manual contains specific instructions related to generator placement in addition to NFPA 37, including the requirement that carbon monoxide detectors be installed and maintained in your home or business.

⁶ Fuel consumption rates are estimated based on normal operating conditions. Generator operation may be greatly affected by elevation and the cycling operation of multiple electrical appliances – fuel flow rates may vary depending on these factors.

⁷ Per ISO 3744. Sound level measurement at other locations around generator may differ depending on installation, based on lowest microphone at 7m. Normal operation based on average household usage.

Briggs & Stratton has a policy of continuous product improvement and reserves the right to modify its specifications at any time and without prior notice.

This standby generator is not for Prime Power applications.

Published July 2021. Please visit BRIGGSandSTRATTON.com for the latest information.

BS1302 - 7/21